


track configuration is optimized for the groomed and lightly off-trail conditions that define the trail snowmobile category. The front suspension features AWS 42 with 8.2 in of travel, while the rear suspension uses SLIDE-ACTION with 3 Wheel Rear Axle Assembly, Coupling Blocks, Torque-Sensing Link Rear Arm & Adjustable Torsion Springs with 13.5 in of travel for the intended riding style.

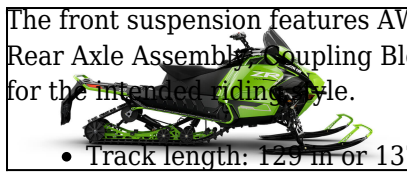

- Track length: 129 in or 137 in
- Track width: 15 in
- Track type: Ripsaw II
- Lug height: 1.25 in
- Pitch: 2.86 in
- Front suspension: AWS 42
- Front travel: 8.2 in
- Rear suspension: SLIDE-ACTION with 3 Wheel Rear Axle Assembly, Coupling Blocks, Torque-Sensing Link Rear Arm & Adjustable Torsion Springs

Product Description

- Rear travel: 13.5 in
- Ski type / width: Trail - 6 in
- Ski stance: 41.5-42.5 in - Adjustable
- Brakes: Stealth Hydraulic Master Cylinder

Arctic Cat ZR 858 Sno Pro EPS SG 2027 858cc Snowmobile

Chassis and Dimensions

The ZR delivers responsive handling, capable power and everything you need for a full day of trail domination. With the rider-first CATALYST™ platform and available electronic power steering, these sleds provide confident control. The ZR 858 Sno Pro EPS SG offers competitive specification for its class and benefits from Arctic Cat's legacy of snowmobile innovation. Whether you are a seasoned enthusiast or a rider building hours in their home riding area, the ZR 858 Sno Pro EPS SG brings a proven combination of chassis engineering, powertrain capability, and standard equipment to the trails. The chassis of the Arctic Cat ZR 858 Sno Pro EPS SG is designed to balance rigidity with weight management. With trail performance and rider ergonomics as key drivers, the heat exchanger configuration is front long tunnel, designed for consistent cooling across typical operating temperatures.

Arctic Cat has been producing snowmobiles since 1962 and the ZR series continues that tradition with a machine that reflects current engineering priorities while remaining true to the brand's commitment to rider-focused design. The Sno Pro designation signals a higher level of suspension specification and performance-oriented tuning, placing this model at the more capable end of the lineup. The SG designation indicates a special edition model with a distinct appearance package, offering riders a visually unique variant within the lineup. The 858cc engine at the core of the ZR 858 Sno Pro

Features and Standard Equipment

conditions with consistency and character.

The ZR 858 Sno Pro EPS SG offers a wide range of optional items from those building their first sleds to those who riding experienced riders seeking a reliable and well-rounded machine for regular use. It performs well on groomed trail evening systems, light off-trail terrain, and offers a speed and handling typical of a full power trail sled. The combination of proven powertrain, capable suspension, and thoughtfully selected equipment makes it a strong all-around choice. In the ZR 858 Sno Pro EPS SG, you get a distinctive and purposeful appearance. 12 Months warranty.

Engine and Powertrain

12V Outlet, Sport Front Bumper, Integrated Goggle Holder, ATACH mounting, Hand & Thumb Warmers, Standard Brake Disc, EPS Steering, Tether Switch, Visor Plug-In.

The ZR 858 Sno Pro EPS SG is powered by a 858, 2-Stroke engine, liquid cooled, with next gen. c-tec2 fuel delivery. The bore and stroke dimensions of 85 x 75.6 mm give the engine its distinctive power character. Clutch duties are handled by an ADAPT ADAPT Medium Height Plate to deliver smooth and efficient power transfer across the power range. The exhaust system, handbuilt stainless steel exhaust & egt sensors, contributes to the engine's overall performance character. A minimum seating style fuel

- Available colors: White
- Displacement: 858cc
- Engine type: 858, 2-Stroke
- Cooling: Liquid
- Cylinders: 2
- Bore x stroke: 85 x 75.6 mm
- Fuel delivery: Next Gen. C-TEC2
- Drive clutch: ADAPT
- Driven clutch: ADAPT
- Reverse: Push-Button Engine
- Fuel capacity: 10.4 gal
- Minimum octane: 91
- Starter: Push-Button Electric Start

Track and Suspension

The ZR 858 Sno Pro EPS SG runs a 129 in or 137 in x 15 in Ripsaw II track with a 1.25 in lug height and 2.86 in pitch. The